




- NOTES:
1. DIMENSIONS A, B, C, & F ARE REQUIRED
 2. MINIMUM HEADER HEIGHT IS 6-1/4 [158.75]
 3. LIMITS FOR "G": 8" RADIUS (G = 3" TO 4-1/4")
10" RADIUS (G = 4-1/2" TO 6-1/2")
 4. CHART PLACES HORIZONTAL TRACK AS HIGH AS POSSIBLE

HEADER WITHOUT DOOR HANG DOWN

| | | | | | | |
|-----------------|--------------------|----------------------------|--------------------|-----------|---------------------------|------------------|
| 2376 7176 | 10" | 6-1/2" | 10" | 11-4/11-5 | 1336-1/-2 | 3-1/2" |
| COUNTER BALANCE | F EFFECTIVE HEADER | G TRACK HEIGHT FROM HEADER | H TRACK RADIUS P/N | | I TOP CLOSURE BRACKET P/N | TRACK TO CEILING |

| | | | | | |
|--------------------|--------|--------|--------------|------------------------------------|--------|
| 2376 OR 7176 | 9-3/4" | 6-1/2" | 10" | 1336-1 1336-2 | 3-1/4" |
| | 9-1/2" | 6-1/4" | | | |
| 2376 | 9-1/4" | 6" | 11-4 11-5 | OPTIONAL 1336-5 SS 1336-6 SS | 3-1/4" |
| | 9" | 5-3/4" | | | |
| | 8-3/4" | 5-1/2" | | | |
| | 8-1/2" | 5-1/4" | | | |
| | 8-1/4" | 5" | | | |
| | 8" | 4-3/4" | | | |
| 2376 | 7-3/4" | 4-1/2" | 8" | OPTIONAL 1336-7 SS 1336-8 SS | 3-1/4" |
| | 7-1/2" | 4-1/4" | | | |
| | 7-1/4" | 4" | | | |
| | 7" | 3-3/4" | | | |
| | 6-3/4" | 3-1/2" | | | |
| | 6-1/2" | 3-1/4" | | | |
| | 6-1/4" | 3" | 11-2 11-3 | | |

| | | | | | | | | | | |
|----------------|--------------|--------------|------------|----------------|-----------------|------------------|--------------------------|--------------------|-------------------------|------------------|
| A | B | C | D | E | F | G | H | I | | |
| SILL TO HEADER | WALL TO WALL | POST TO POST | DOOR WIDTH | VERTICAL TRACK | COUNTER BALANCE | EFFECTIVE HEADER | TRACK HEIGHT FROM HEADER | TRACK RADIUS & P/N | TOP CLOSURE BRACKET P/N | TRACK TO CEILING |

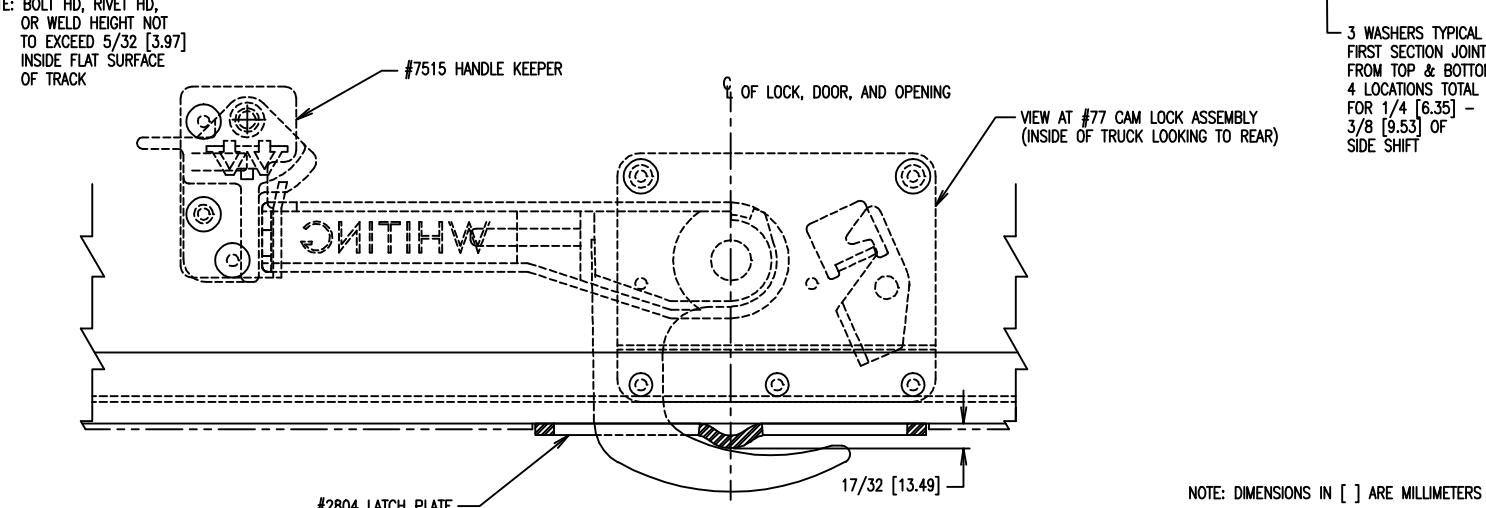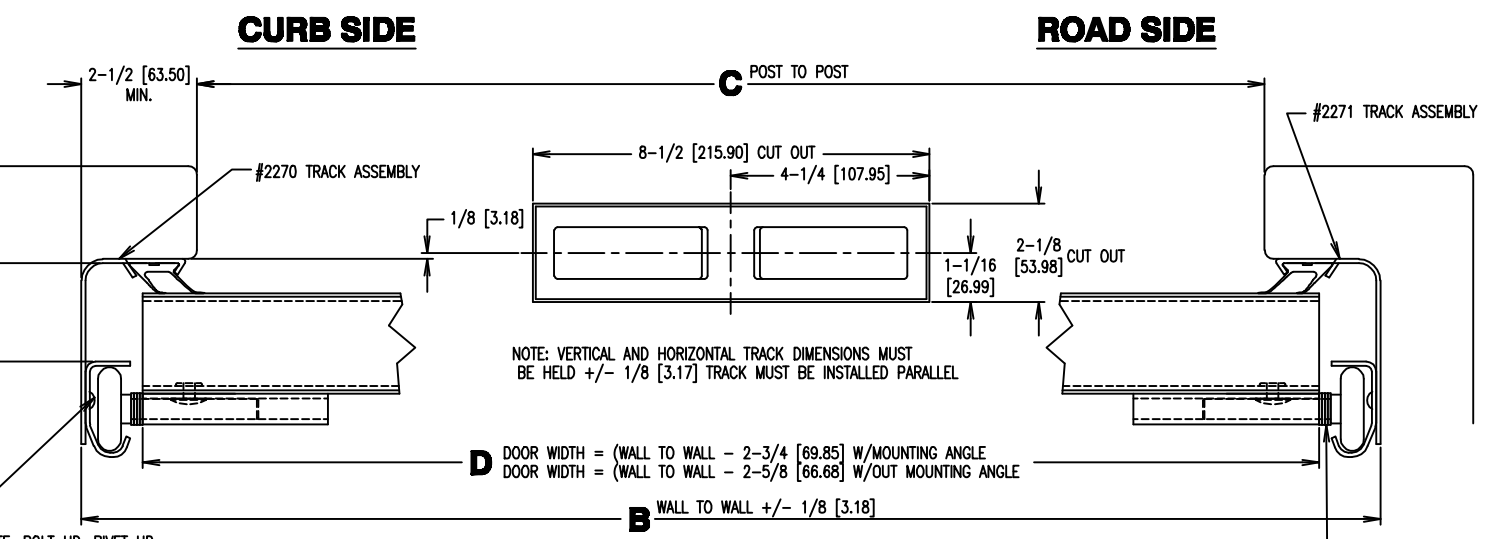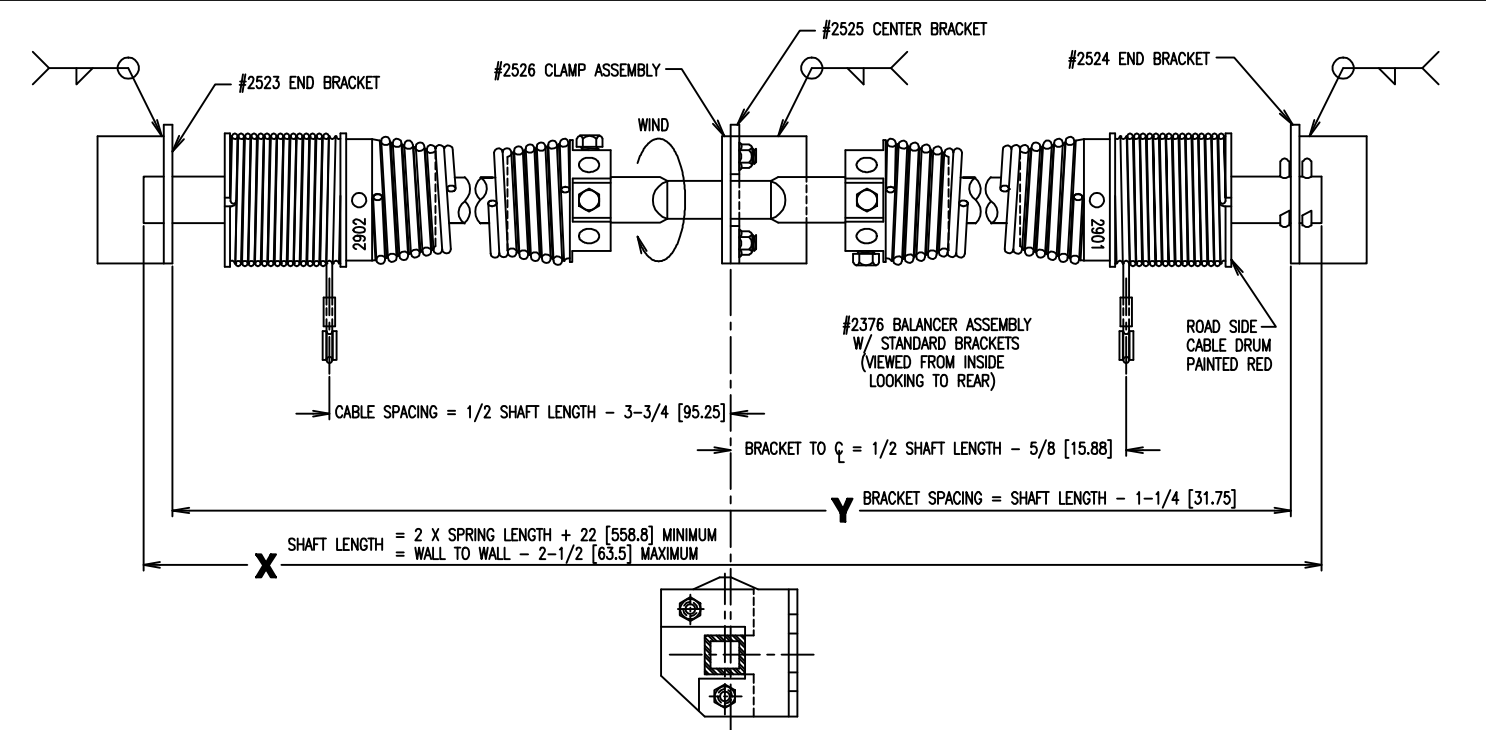

| | | | | | | | | |
|---------|-----|------------------------------|------|-----|--|---|---|---|
| 12/2/09 | T | ADDED MINIMUM CLEARANCE | MJS | GSB | TOLERANCES UNLESS OTHERWISE SPECIFIED ARE: | | WHITING DOOR MANUFACTURING CORP. GENERAL OFFICE: 113 CEDAR ST. AKRON, NY. 14001 DEVELOPER OF THE FIRST PRACTICAL ROLL-UP DOOR IN 1953 | TITLE STANDARD INSTALLATION 2-1/8" COLDSAVER DOOR |
| 8/12/09 | S | ADDED CHART FOR NO HANG DOWN | MJS | GSB | DECIMAL ±.010 | | | |
| 6/13/08 | R | REVISED PRINT, ADDED CHART | MJS | GSB | FRACTION ±1/16 | DRAWN BY METZ DATE 6/18/79 CHECKED TERRITORY | SCALE 1/2"=1" DWG. NO. D-1946 REV. T | |
| 7/5/07 | Q | REVISED PRINT, ADDED CHART | MJS | GSB | ANGLES ±1/2" | DO NOT SCALE DRAWING APPROVED BY DATE | | |
| DATE | SYM | DESCRIPTION OF CHANGE | AUTH | DR | | | | |